

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

For electrically insulating, amplifying and converting DC signals

 0102 

Application

The purpose of the isolating amplifier **SINEAX TV 809** (Fig. 1) is to electrically insulate input and output signals, respectively to amplify and/or change the signal level or type (current or voltage) of the input signals.

Measured variables and measuring ranges are programmed with the aid of a PC, a programming cable and the programming software. Specific measured variable data such as analog output signal, transmission characteristics and various functions in combination with the alarm function can also be programmed.

The isolating amplifier fulfils all the important requirements and regulations concerning electromagnetic compatibility **EMV** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standard ISO 9001/EN 29001**.

An explosion-proof "Intrinsically safe" [EEx ia] IIC version rounds off this series of SINEAX TV 809.

Features / Benefits

- Measuring input (current, voltage, measuring range), measuring output (current, voltage, output range) and relay functions programmed using PC / Simplifies project planning and engineering, short delivery times, low stocking levels
- Input voltage up to ± 1000 V
- Short setting time
- Programmable input filter
- Any conversion factor, also with signal inversion
- Possibility to linearize the input signal
- Online measurement interrogation and control of the outputs via PC
- Built-in alarm relay (optionally)
- Wide DC, AC power pack tolerance / Universal
- Available in type of protection "Intrinsic safety" [EEx ia] IIC (see Table 6: "Data on explosion protection")

Standard versions

The following versions are available as standard versions already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1: Instruments in standard or Ex version (without alarm relay)

| Version | Measuring input* | Measuring output* | Power supply | Screw terminals | Order No. |
|----------|--------------------------------------------------------------------|--------------------------------------------------|--------------------|-----------------|-----------|
| Standard | programmable within ± 1000 V (Ex max. 30 V) resp. ± 100 mA | programmable within ± 20 mA resp. ± 10 V | 24 ... 60 V DC, AC | not pluggable | 147 258 |
| | Basic configuration 4 ... 20 mA | 85 ... 230 V DC, AC | 147 266 | | |
| | 85 ... 230 V DC, AC | pluggable | 147 282 | | |

* The type of output variable (current or voltage) is configurable with software.

Please complete the Order Code 809-..... according to "Table 7: Ordering information" for versions with user-specific input and/or output ranges.



Fig. 1. Isolating amplifier SINEAX TV 809 in housing P12/17, terminals not pluggable.

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

Programming

A PC, the programming cable PRKAB 600 (for Ex versions) resp. PRKAB 560 (for non-Ex versions) plus ancillary cable and the configuration software TV 800 *plus* are required to program the isolating amplifier.

The connection between

"PC ↔ PRKAB 600 resp. 560 ↔ SINEAX TV 809" can be seen from Fig. 2. The power supply must be connected in order to configure the SINEAX TV 809.

The software TV 800 *plus* is supplied on a CD and runs under Windows 95 or higher.

The programming cable PRKAB 600 resp. PRKAB 560 adapts the signal level and provides galvanic isolation between the PC and the SINEAX TV 809 isolating amplifier.

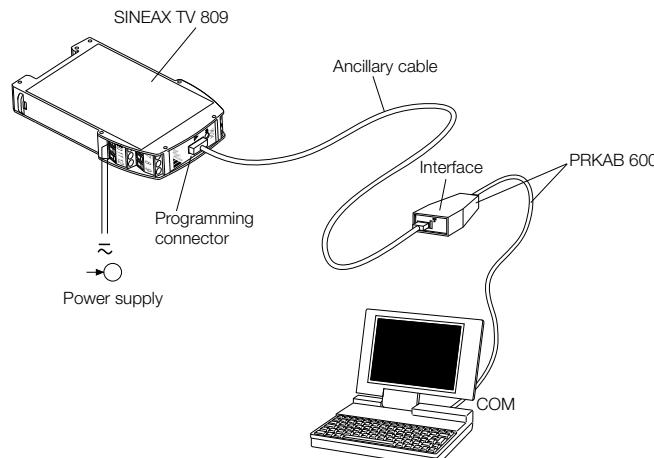


Fig. 2. Programming a SINEAX TV 809 in Ex-version.

Technical data

Measuring input →

DC current:

Type 809 – xx1

Start value/final value between
– 100 and 100 mA, $R_i = 15.4 \Omega$
any point may be zero

Type 809 – xx2

Start value/final value between
– 1.5 and 1.5 mA, $R_i = 1 \text{ k}\Omega$
any point may be zero

DC voltage:

EEx version max. 30 V

$\leq \pm 1.7 \text{ V}$, $R_i = 1 \text{ M}\Omega$

$> \pm 1.7 \text{ to } \leq \pm 100 \text{ V}$, $R_i = 540 \text{ k}\Omega$

$> \pm 100 \text{ to } \pm 1000 \text{ V}$, $R_i = 5.5 \text{ M}\Omega$

Reduced safety see Table 5

Restriction:

Min. span $\geq 0.1 \cdot$ Highest input value quantity

Example:

Start value = – 5 V

Final value = + 3 V

Highest input value quantity = 5 V

Measuring output ↗

DC current, DC voltage and range programmable

DC current:

Reference range – 20 ... 20 mA

Start and final values anywhere within the reference range, also with reversed direction,
e.g. 20 ... 4 mA;

For reduced start or final value, additional error (lower resolution)

Burden voltage:

12 V

Current limit
under overload:

Approx. $\pm 22 \text{ mA}$

Open-circuit voltage:

< 16 V

External resistance:

$$R_{\text{ext}} \text{ max. } [\text{k}\Omega] = \frac{12 \text{ V}}{I_{\text{AN}} \text{ [mA]}}$$

I_{AN} = Output voltage end value

< 0.5% p.p.

DC voltage:

Reference range – 10 ... 10 V

Start and final values anywhere within the reference range, also with reversed direction,
e.g. + 10 ... – 5 V;

For reduced start or final value, additional error (lower resolution)

Voltage limit
under overload:

Approx. $\pm 11 \text{ V}$

Short-circuit current:

$\leq 60 \text{ mA}$

External resistance:

$$R_{\text{ext}} \text{ min. } [\text{k}\Omega] \geq \frac{U_{\text{AN}} \text{ [V]}}{10 \text{ mA}}$$

U_{AN} = Output voltage end value

Residual ripple:

< 0.5% p.p.

Table 2: Rise time / Setting time

| Rise time (63%) [s] | | Setting time (99%) [s] | |
|---------------------|-------|------------------------|-------|
| 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| 0.04 | 0.03 | 0.08 | 0.07 |
| 0.06 | 0.05 | 0.17 | 0.14 |
| 0.10 | 0.08 | 0.36 | 0.30 |
| 0.18 | 0.15 | 0.72 | 0.60 |
| 0.34 | 0.28 | 1.5 | 1.2 |
| 0.66 | 0.55 | 3.0 | 2.5 |
| 1.3 | 1.1 | 6.0 | 5.0 |
| 2.6 | 2.2 | 12 | 10 |
| 5.1 | 4.3 | 24 | 20 |
| 10.3 | 8.6 | 48 | 40 |
| 20.5 | 17 | 94 | 80 |
| 41 | 34 | 190 | 160 |
| 82 | 68 | 380 | 315 |
| 160 | 140 | 750 | 630 |
| 330 | 270 | 1500 | 1260 |

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

Programming connector

Interface: Serial interface

Accuracy data (acc. to EN/IEC 60 770-1)

The reference value is the output reference range. For a reduced output range, the relative error increases in proportion to the reduction.

Basic conditions: Error limits $\leq \pm 0.2\%$
incl. linearity and reproducibility errors

Reference conditions

| | |
|---------------------|------------------------------------------------|
| Ambient temperature | 23 °C, ± 2 K |
| Power supply | 24 V DC $\pm 10\%$ and 230 V AC $\pm 10\%$ |
| Output burden | Current: 300 Ω Voltage: 2 k Ω |

Influencing factors

| | |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Temperature | $< \pm 0.1\%$ per 10 K |
| Burden influence | $< \pm 0.1\%$ |
| Longtime drift | $\leq \pm 0.3\%$ / 12 months |
| Switch-on drift | $< \pm 0.2\%$ |
| Common and transverse mode influence | $\leq \pm 0.1\%$ For voltage input, the transversal error voltage corresponds to the final value selected |
| Output + or - connected to ground | $< \pm 0.1\%$ |

Power supply →○

DC, AC power pack (DC or 45...400 Hz)

Table 3: Nominal voltages and tolerances

| Nominal voltage U_N | Tolerance | Instrument versions |
|-----------------------|------------------------------------|-------------------------------------------------------|
| 24 ... 60 V DC, AC | DC – 15 ... + 33% AC $\pm 15\%$ | Standard (Non-Ex) |
| 85 ... 230 V DC, AC | | Type of protection "Intrinsic safety" [EEx ia] IIC |
| 85 ... 230 V AC | $\pm 10\%$ | |
| 85 ... 110 V DC | $- 15 ... + 10\%$ | |

Power input: ≤ 1.2 W resp. ≤ 2.5 VA

Supervising a limit GW (⊓)

This section is only valid for isolating amplifiers that are ordered and fitted with a relay for limit value indication.

Output contact K: Relay
1 galvanically isolated switching contact

Trip point type: Programmable

- Inactive
- Low trip point of measured variable (see Fig. 3, left)
- High trip point of measured variable (see Fig. 3, right))

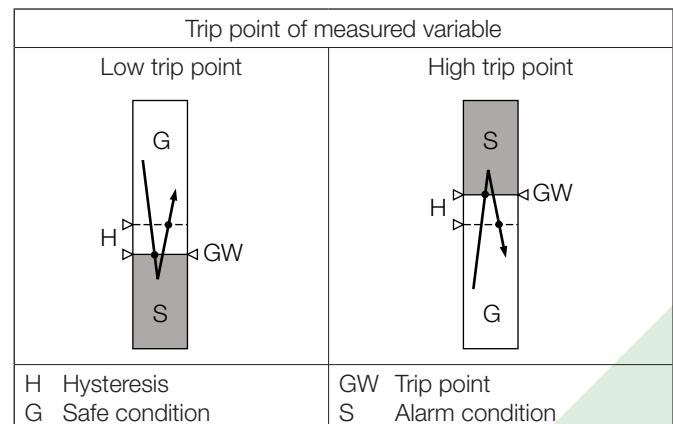


Fig. 3. Switching function, according to trip point type.

Trip point adjustment with PC for trip point:

Programmable
– between –10 and 110%¹

Hysteresis:

Programmable
– between > 0 and 100%¹

Energizing and de-energizing delays:

Programmable
– between 0 to 1080 s

Rely contact position:

Programmable
– see Table 7
Feature 14

Frontplate signals:

The green LED "ON" flashes when the limit value is exceeded

Table 4: Contact arrangement and data

| Symbol | Material | Contact rating |
|--------|---------------------------|------------------------------------------------------------------|
| | Gold flashed silver alloy | AC: ≤ 2 A / 250 V (500 VA) DC: ≤ 2 A / 125 V (60 W) |

Relay approved by UL, CSA, SEV

Installation data

Housing:

Housing P12/17 and P12/17 St
Refer to Section "Dimensional drawings" for dimensions

Material of housing:

Lexan 940 (polycarbonate)
Flammability Class V-0 acc. to UL94,
self-extinguishing, non-dripping,
free of halogen

Mounting:

For snapping onto top-hat rail
(35 × 15 mm or 35 × 7.5 mm) acc.
to EN 50 022

Position of use:

Any

¹ In relation to the analog input value range.

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

| | |
|-------------------------------|-------------------------------------------------------------------------------------------|
| Electrical terminals: | PHOENIX screw terminals with wire guards, for 0.14 mm ² to 2.5 mm ² |
| Weight: | Approx. 0.1 kg |
| Electrical insulation: | All circuits (measuring input/measuring output/power supply) are electrically insulated |

Regulations

| | |
|-----------------------------------------------|-------------------------------------------------------|
| Electromagnetic compatibility: | The standard EN 50 081-2 and EN 50 082-2 are observed |
| Intrinsically safe: | Acc. to EN 50 020 |
| Protection (acc. to IEC 529 resp. EN 60 529): | Housing IP 40 Terminals IP 20 |
| Electrical standards: | Acc. to IEC 1010-1 (1990) resp. EN 61 010-1 (1993) |

Permissible operating voltage acc. to EN 61 010-1, 1st edition
(R.M.S. value, increased isolation, contamination level 2, overvoltage category II, up to 2000 m)

Table 5:

| | Input | Output | Relay |
|--------------|--------|-----------------|-----------------|
| Power supply | 1000 V | 600 V | 300 V |
| Input | | 600 V (1000 V)* | 600 V (1000 V)* |
| Output | | | 300 V |

* Values in brackets are valid for the overvoltage category I

Test voltage AC / 50 Hz / 1 minute

| | Input | Output | Relay |
|--------------|--------|--------|--------|
| Power supply | 3700 V | 3700 V | 2300 V |
| Input | | 3700 V | 3700 V |
| Output | | | 2300 V |

Ambient tests

| | |
|----------------------|----------------------------------------------------------------|
| EN 60 068-2-6: | Vibration |
| Acceleration: | ± 2 g |
| Frequency range: | 10 ... 150 ... 10 Hz, rate of frequency sweep: 1 octave/minute |
| Number of cycles: | 10, in each of the three axes |
| EN 60 068-2-27: | Shock |
| Acceleration: | 3 x 50 g 3 shocks each in 6 directions |
| EN 60 068-2-1/-2/-3: | Cold, dry heat, damp heat |

Environmental conditions

| | |
|--------------------------------|----------------|
| Commissioning temperature: | -10 to + 55 °C |
| Operating temperature: | -25 to + 55 °C |
| Storage temperature: | -40 to + 70 °C |
| Annual mean relative humidity: | ≤ 75% |

Table 6: Data on explosion protection  II (1) GD

| Order Code | Type of protection "Intrinsic safety" Marking Instrument | Measuring input | Type Examination Certificate | Mounting location of the instrument |
|-----------------|----------------------------------------------------------------|-----------------|---------------------------------------------------|----------------------------------------|
| 809-33/34/93/94 | [EEx ia] IIC | EEx ia IIC | Type Examination Certificate ZELM 01 ATEX 0051 | Outside the hazardous area |

Table 7: Ordering information (see also Table 1: Standard version)

| Description | *Blocking code | No-go with locking code | Article No./Feature |
|-------------------------------------------------------------------------------|------------------------------------|-------------------------|---------------------|
| SINEAX TV 809 | Order Code 809 - xxxx xxxx xxxx xx | | 809 - |
| Features, Selection | | | |
| 1. Mechanical design | | | |
| Housing P12/17 for rail mounting, connecting screw terminals not pluggable | | | 3 |
| Housing P12/17 St for rail mounting, connecting screw terminals pluggable | | | 9 |

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

| Description | *Blocking code | No-go with locking code | Article No./Feature |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------|---------------------|
| SINEAX TV 809 | Order Code 809 - xxxx xxxx xxxx xx | | 809 – |
| Features, Selection | | | |
| 2. Version / Power supply H | | | |
| Standard / 24 ... 60 V DC/AC | | | 1 |
| Standard / 85 ... 230 V DC/AC | | | 2 |
| [EEx ia] IIC / 24 ... 60 V DC/AC, input intrinsically safe | | | 3 |
| [EEx ia] IIC / 85 ... 110 V DC, 230 V AC, input intrinsically safe | | | 4 |
| 3. Current input rating | | | |
| Input current, max. final value 100 mA (standard version) | D | | 1 |
| Input current, max. final value 1.5 mA | E | | 2 |
| For hardware layout of current input. Must be specified, even if used (programmed) for voltage input only! | | | |
| 4. Alarm function | | | |
| Without alarm function | F | | 0 |
| With built-in alarm relay | | | 1 |
| 5. Test records | | | |
| Without test records | | | 0 |
| Test records in German | | | D |
| Test records in English | | | E |
| 6. Configuration | | | |
| Basic configuration programmed | G | | 0 |
| Specification complete! | | | |
| Basic configuration corresponds with input current max. final value 100 mA, Line 0 in feature 7 to 11 as well as line 0 in feature 12 to 14, without alarm function or line 1 in feature 12 to 14, with alarm function. | | | |
| With input current max. final value 1.5 mA, line 1 in feature 7 corresponds with the basic configuration. | | | |
| Programmed to order | | | 1 |
| The following features 7 to 11 resp. 7 to 14 (with alarm contact) must be fully specified. | | | |
| 7. Input signal | | | |
| Input 4 ... 20 mA | E | | 0 |
| Input 0 ... 1 mA | D | | 1 |
| Input [M] | G | | 9 |
| Input [V] initial/final value between – 1000 and 1000 at standard version, EEx version max. 30 V! | | | |
| Zero position anywhere, minimal span 0.05 V* | | | |
| Input [mA] | G | | Z |
| Input [mA] at nominal value 100 mA (line 1 in feature 3) initial/final value between – 100 and 100, zero position anywhere, minimal span 3 mA* | | | |
| Input [mA] at nominal value 1.5 mA (line 2 in feature 3) initial/final value between – 1.5 and 1.5, zero position anywhere, minimal span 0.09 mA* | | | |
| * Minimal span ≥ 0.1 x highest input value quantity | | | |

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

| Description | *Blocking code | No-go with locking code | Article No./Feature |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------|---------------------|
| SINEAX TV 809 | Order Code 809 - xxxx xxxx xxxx xx | | 809 – |
| Features, Selection | | | |
| 8. Output signal | | | |
| Output 4 ... 20 mA | | | 0 |
| Output (reference range – 10 ... 10 V) | [V] | G | 9 |
| Output (reference range – 20 ... 20 mA) | [mA] | G | Z |
| Lines 9 and Z: Any initial and final value within reference range, also with inversed characteristic, e.g. 20 ... 4 mA, + 10 ... – 5 V. Attention! Additional error (lower resolution) for reduced start or final value! | | | |
| 9. Output characteristic | | | |
| Linear | | | 0 |
| Special characteristic (for individual characteristic, on inquiry) | | G | 9 |
| 10. Output time response | | | |
| Setting time standard, approx. 80 ms | | | 0 |
| Setting time | [s] | G | 9 |
| Values from 0.14 to 1500 s in 14 steps, depending on the selected frequency in feature 11; values for 50 and 60 Hz | | | |
| 11. Mains ripple suppression | | | |
| For frequency 50 Hz | | | 0 |
| For frequency 60 Hz | | G | 1 |
| 12. Alarm, type and values | | | |
| Alarm function inactive | H | | 0 |
| High alarm 90%; hysteresis 1% (standard values) | K | F | 1 |
| High alarm, hysteresis | [%; %] | FG | 2 |
| Low alarm, hysteresis | [%; %] | FG | 3 |
| Lines 2 and 3: Specify values in % of the input span, Setpoint: Any value between – 10% and 110%, with initial value of measuring range always corresponding to 0%; hysteresis > 0 to 100%. Examples for setpoint (extreme values): | | | |
| Input range: | Input at – 10%: | Input at 110%: | |
| 4 ... 20 mA | 2.4 mA | 21.6 mA | |
| – 10 ... 10 mA | – 12 mA | 12 mA | |
| – 5 ... 10 V | – 6.5 V | 11.5 V | |
| 13. Alarm, switching delay | | | |
| Alarm function inactive | | K | 0 |
| Delay energizing/deenergizing 0.2 s (standard) | | H | 1 |
| Delay energizing/deenergizing | [s; s] | GH | 2 |
| Energizing and deenergizing delay [s] 0 to 1080 | | | |

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

| Description | *Blocking code | No-go with locking code | Article No./Feature |
|-------------------------------------------------------|-------------------------------------------|-------------------------|---------------------|
| SINEAX TV 809 | Order Code 809 - xxxx xxxx xxxx xx | | 809 – |
| Features, Selection | | | |
| 14. Alarm, mode of action | | | |
| Alarm function inactive | K | | 0 |
| Contact closed in alarm condition and at power loss | H | | 1 |
| Contact open in alarm condition and at power loss | GH | | 2 |
| Contact closed in alarm condition, open at power loss | GH | | 3 |
| Contact open in alarm condition, closed at power loss | GH | | 4 |

* Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "Blocking Code".

Electrical connections

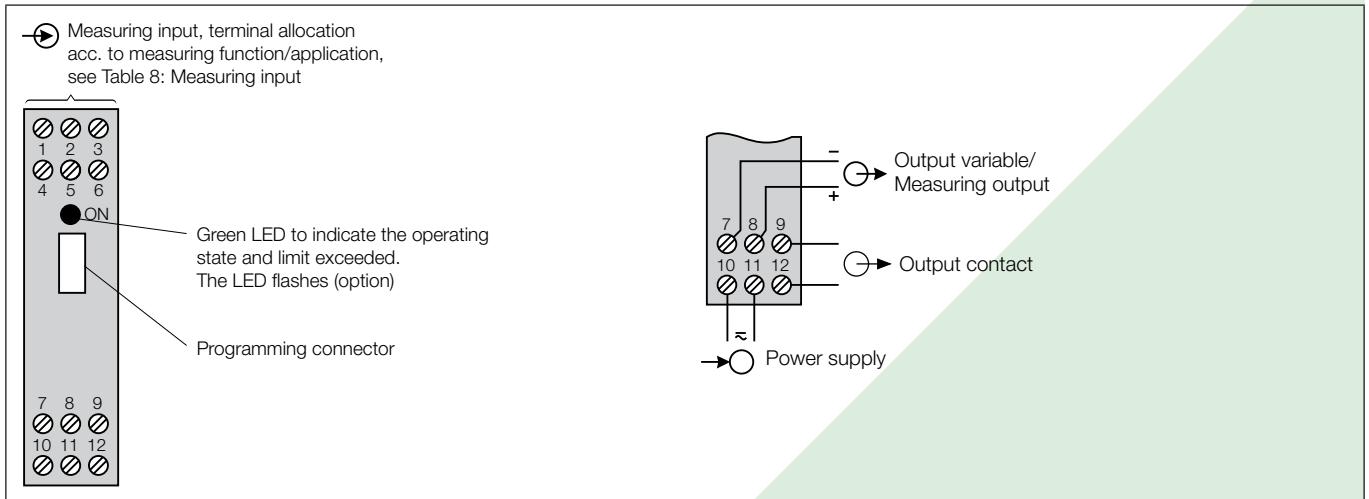
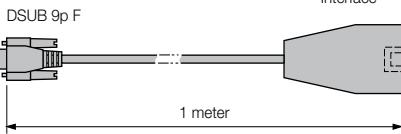
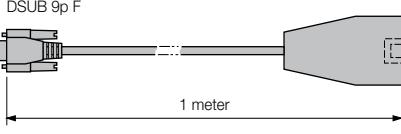


Table 8: Measuring input

| Measuring function / Application | Measuring range limits | Terminal allocation |
|----------------------------------|------------------------------------------------|---------------------|
| DC voltage | $\leq \pm 1.7 \text{ V}$ | |
| | $> \pm 1.7 \text{ to } \leq \pm 100 \text{ V}$ | |
| | $> \pm 100 \text{ to } \pm 1000 \text{ V}$ | |
| DC current | $\leq \pm 100 \text{ mA}$ | |
| | $\leq \pm 1.5 \text{ mA}$ | |

SINEAX TV 809, 1 channel Programmable Isolating Amplifier

Table 9: Accessories and spare parts

| Description | Order No. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Programming cable PRKAB 560 (for programming the SINEAX TV 809, nont-Ex) | |
| DSUB 9p F Interface  | 147 779 |
| Programming cable PRKAB 600 (for programming the SINEAX TV 809 Ex) | |
| DSUB 9p F Interface  | 147 787 |
| Ancillary cable for SINEAX Type TV 809 | |
|  | 143 587 |
| Configuration software TV 800 plus on CD (Download free of charge under http://www.camillebauer.com) | 146 557 |
| Operating Instructions TV 809 Bd in German | 147 422 |
| Operating Instructions TV 809 Bf in French | 147 795 |
| Operating Instructions TV 809 Be in English | 147 802 |

Dimensional drawings

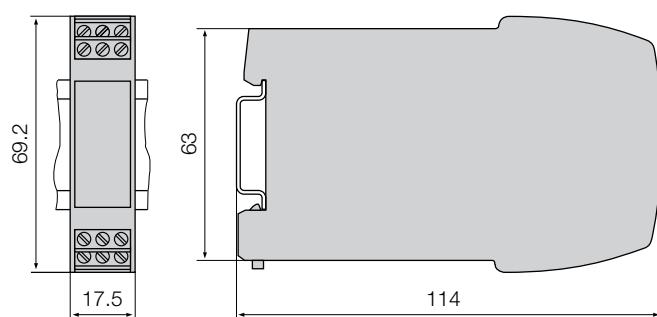


Fig. 4. SINEAX TV 809 in housing **P12/17** clipped onto a top-hat rail
(35 x 15 mm or 35 x 7.5 mm, acc. to EN 50 022),
connecting screw terminals not pluggable.

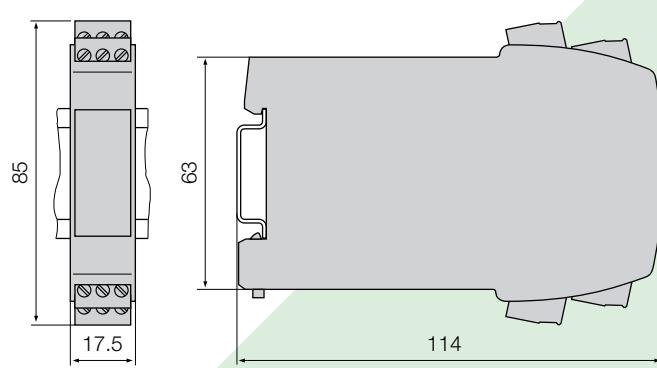


Fig. 5. SINEAX TV 809 in housing **P12/17 St** clipped onto a top-hat rail
(35 x 15 mm or 35 x 7.5 mm, acc. to EN 50 022)
connecting screw terminals pluggable.

Standard accessories

- 1 Operating Instructions in German, French and English
- 1 Type examination certificate (only for "intrinsically safe" explosion-proof devices)

 **CAMILLE BAUER**
Rely on us.

Camille Bauer Ltd
Aargauerstrasse 7
CH-5610 Wohlen / Switzerland
Phone: +41 56 618 21 11
Fax: +41 56 618 35 35
e-mail: info@camillebauer.com
www.camillebauer.com