



SINEAX TV829
Isolation up to 3600 V DC

High-voltage isolation amplifier

SINEAX TV829

Advantages


- Calibrated measuring range shift
- Wide-range power pack
- High common-mode rejection

Application

SINEAX TV829 high-voltage isolation amplifiers isolate direct current voltages safely up to 3600 V DC. This voltage level is mainly found in railway systems so that the devices correspond to the DIN EN 50124-1 railway standard. For the current measurement via shunt a device in a narrow housing is used. The shunt can lay on a high potential of up to 3,6 kV AC/DC. Two other device versions measure high direct voltages, e.g. the voltage of catenary lines.

Typical voltage or current signals are available at the output, e.g. to control electric drive systems or to monitor catenary voltages.

A wide-range power pack permits applications in all supply systems.

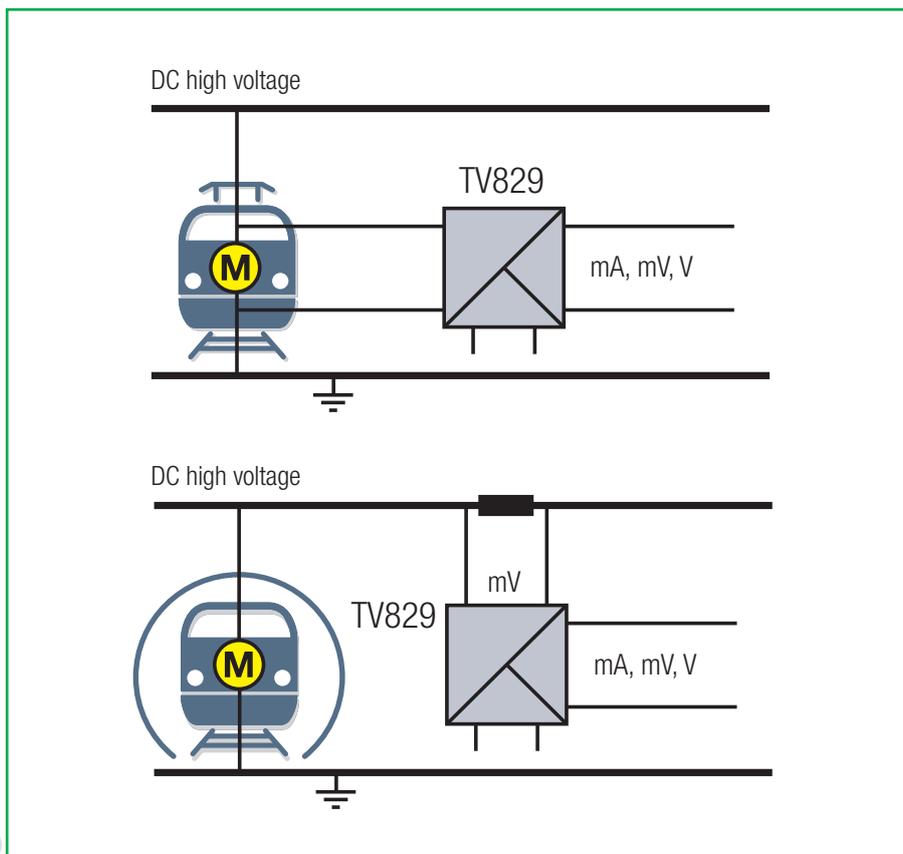

Technical data

Measuring input

Shunt voltage measurement

$\pm 60 \text{ mV}$, $\pm 90 \text{ mV}$, $\pm 150 \text{ mV}$, $\pm 300 \text{ mV}$, $\pm 500 \text{ mV}$, $\pm 10 \text{ V}$

Voltage measurement

$\pm 400 \text{ V}$, $\pm 600 \text{ V}$, $\pm 800 \text{ V}$, $\pm 1000 \text{ V}$, $\pm 1200 \text{ V}$, $\pm 1400 \text{ V}$, $\pm 1880 \text{ V}$, $\pm 2000 \text{ V}$, $\pm 2200 \text{ V}$, $\pm 3600 \text{ V}^*)$

Measurement output

4 – 20 mA, $\pm 20 \text{ mA}$, $\pm 10 \text{ V}$

Power supply

20 to 253 V AC/DC

Test voltage

10 kV AC measuring input against measuring output

4 kV AC measuring output against power supply

Operating voltage

acc. to DIN EN 61010-1 and DIN EN 50124-1

2.2 kV AC/DC, Overvoltage Category III,

Pollution degree 2

between measuring input, measuring output and power supply

*) on request

 **CAMILLE BAUER**

Rely on us.

Camille Bauer AG
Aargauerstrasse 7
CH-5610 Wohlen / Switzerland

Phone +41 56 618 21 11
Fax +41 56 618 35 35

info@camillebauer.com
www.camillebauer.com